


Kombi-Stecker, MQS 40 (elektrisch) + 2-PIN MOST (optisch)

A Block A

B Block B

C Block C

D Block D

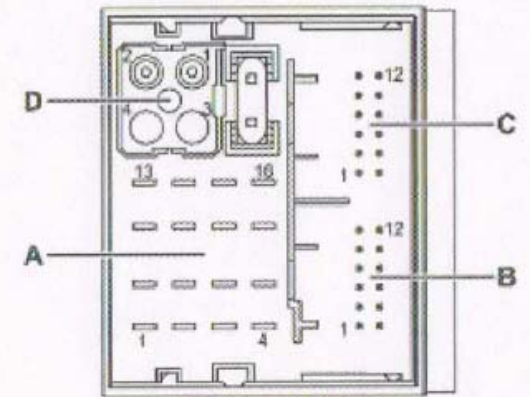

Stecker	Pin	Belegung	Ausstattungsvariante
Block A, 16-Pin, Kodierung A	1	RR+ (AF rear right +)	
	2	FR+ (AF front right +)	
	3	FL+ (AF front left +)	
	4	RL+ (AF rear left +)	
	5	RR- (AF rear right -)	
	6	FR- (AF front right -)	
	7	FL- (AF front left -)	
	8	RL- (AF rear left -)	
	9	Innenraum-CAN, LOW	
	10	Telephone-Mute	
	11	Innenraum-CAN, HIGH	
	12	Ubat -	


	13	n. c.	
	14	n. c.	
	15	Ubat +	
	16	MOST-Wake Up	
Block B, 12-Pin, Kodierung B	1	Microphon_1_In +	
	2	Microphon_2_In +	
	3	n. c.	
	4	Microphon_out_+	Mit Code (512) COMAND APS inkl. DVD-Wechsler und Code (359) Notrufsystem TELE AID
	5	n. c.	
	6	n. c.	
	7	Cradle_Compensator	
	8	n. c.	
	9	Microphon_Ground	

	10	Microphon_out_-	Mit Code (512) COMAND APS inkl. DVD-Wechsler und Code (359) Notrufsystem TELE AID
	11	n. c.	
	12	n. c.	
Block C, 12-Pin, Kodierung B	1	n. c.	
	2	n. c.	
	3	AUX1_shield	Außer Code (518) Media Interface, AUX-Buchse in Handschuhkasten
	4	AUX1_left	Außer Code (518) Media Interface, AUX-Buchse in Handschuhkasten
	5 - 8	n. c.	
	9	AUX1_ground	Außer Code (518) Media Interface, AUX-Buchse in Handschuhkasten
	10	AUX1_right	Außer Code (518) Media Interface, AUX-Buchse in Handschuhkasten
	11 - 12	n. c.	
Block D, Stecker LWL	1	RX-LWL (optical receiving signal)	
	2	TX-LWL (optical transmission signal)	

4

	3 - 4	n. c.	
--	-------	-------	--

Video-Stecker, MQS 18

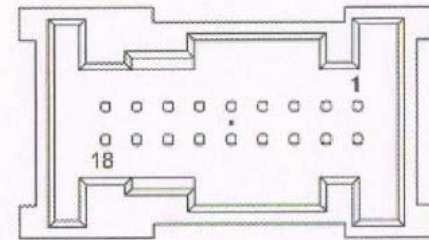

Stecker	Pin	Belegung	Ausstattungsvariante
Video, 18-Pin, Code A	1	Video_in CVBS	
	2	Video_in_Ground	
	3 - 18	n. c.	